

Product Data Sheet



Rockforce® MS730–Roxul® 1000

Engineered mineral fibre (Note Q)

lapinus@lapinusfibres.com
www.lapinusfibres.com

Rockforce® MS730–Roxul® 1000 is a mineral fibre with a very consistent fibre length and a relatively high but consistent content of non-fibrous material, which is applied in refractory products and bitumen / asphalt.


Roxul®1000 chemistry =biosoluble chemistry

All Roxul®1000 products are worldwide exonerated from classification as a carcinogen.


Chemical Analysis

	Min.	Max.
SiO ₂	38 %wt	43 %wt
Al ₂ O ₃	18 %wt	23 %wt
CaO+MgO	23 %wt	28 %wt
FeO	4.5 %wt	8 %wt
K ₂ O+Na ₂ O		4.5 %wt
Others		6 %wt

Typical average fibre diameter

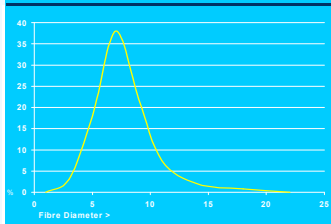

Typical average fibre length

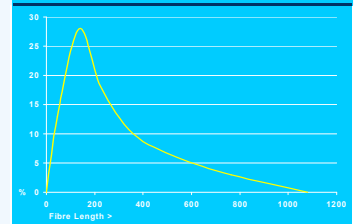

ADVANTAGES OF ROCKFORCE® MS730–ROXUL®1000

- Rockforce® MS730–Roxul®1000 is consistent in quality in terms of:
 - chemical composition
 - fibre length
 - thermal properties
- Rockforce® MS730–Roxul®1000 shows added values in:
 - rheology control
 - economic
 - reinforcement
 - dimensional stability
 - heat resistance

Parameter	Average/Tolerance	Testmethod
Non-Fibrous Material	Norm. Max. N > 125 µm 24.0%wt 30.0%wt	TV 316
Moisture Content	max. 0.1 %wt	TV 302
Ignition Loss	max. 0.3 %wt	TV 302
Fibre Length	225 ± 50 micron	TV 305
Fibre diameter (mass wt. av.)	approx. 9.0 micron	TV 165
Fibre diameter (num. av.)	approx. 5.5 micron	TV 165
Specific surface area	approx. 0.20 m ² /g	TV 165
Hardness	6 Moh	
Melting Point	> 1000 °C	Furnace, Visual
Specific Density	2.75 ± 0.15 g/cm ³	
Colour	Grey/Green	Visual

Author: E. Huynen (ADC)
Issue: July 2008 (03)

Replaces Issue: January 2004 (02)
ISO 9001 LF007.F08